

91Nd-05ND-H07Z


91Nd-05ND-H07Z

91Nd-05ND-H07Z

91Nd-05ND-H07Z

91Nd-05ND-H07Z

91Nd-05ND-H07Z

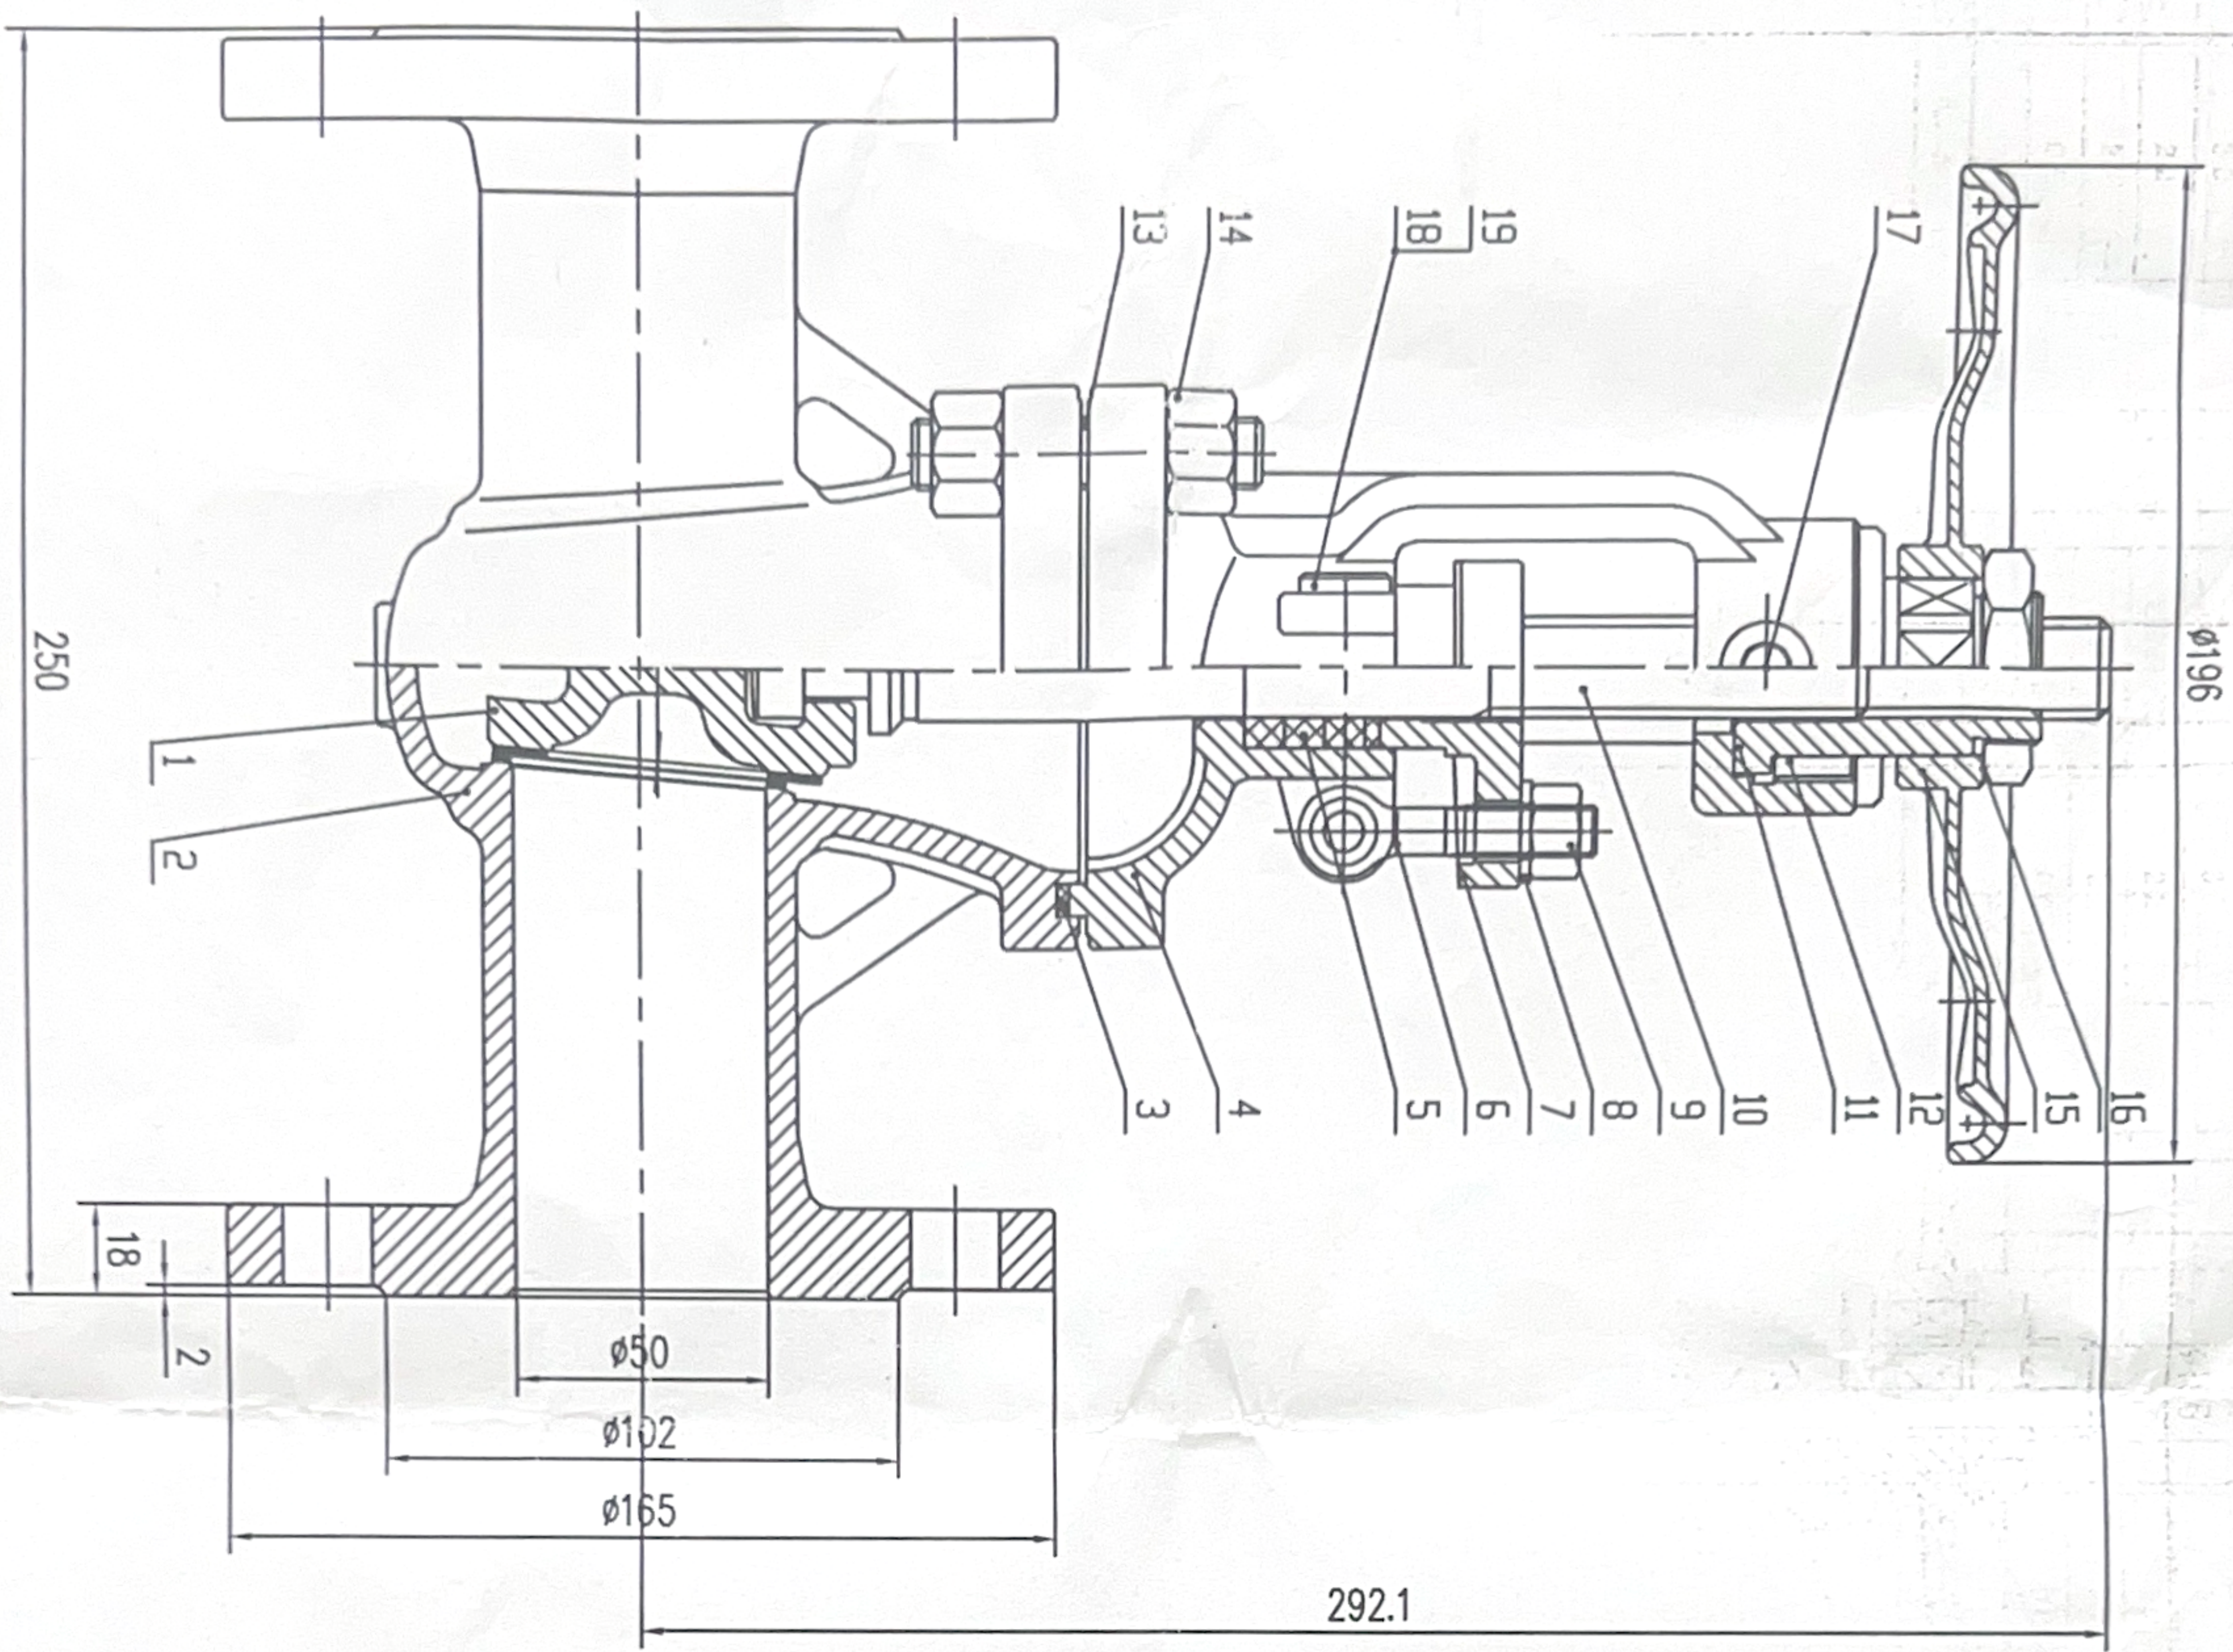

PN		PN16	
试验压力	壳体试验	2.24	Mpa
	上密封试验	~	
	密封试验	1.76	
	气密封试验	0.6	
工作温度		(-29°C)~(+150°C)	
适用介质：水，油，气体			

19	GB/T91-2000	开口销	2	SS304		ø1.6X20	
18	GB/T882-2008	销轴(B型)	2	SS304		ø8X35	
17	JB/T7940.1-1995	直通式压注油杯	1	铜		M10X1	
16	GB/T6172.1-2016	锁紧螺母	1	A29 1025		M30X1.5X10	
15		手轮	1	QT400		S32X17Xø196	
14	GB/T6175	六角螺母	8	A194 8		M14	
13	CB/T901	双头螺栓	4	A193 B8		M14X70	
12		轴承压盖	1	A182 F304/F316		ø55XM45X16-21	
11		阀杆螺母	1	A182 F304/F316		ø42X61XT120x4	
10	Z40H-DN50-4	阀杆	1	A182 F304/F316		ø20Xø30X270	
9	GB/T6175	六角螺母	2	A194 8		M10	
8	GB/T93-1987	平垫圈	2	SS304		ø10	
7	Z40H-DN50-5	压盖	1	A351 CF8/CF3M		ø20.5Xø32XA65	
6	GB/T798-1988	活节螺栓	2	A193 B8		M10X50	
5		填料	5	上下阀杆填料, 中间填料石墨		ø20Xø32X6	
4	Z40H-DN50-2	阀盖	1	A351 CF8/CF3M		高156	
3		中道垫	1	SS304/SS316L+石墨		ø85Xø98X3.8	
2	Z40H-DN50-1	阀体	1	A351 CF8/CF3M		长250	
1	Z40H-DN50-3	阀板	1	A351 CF8/CF3M		ø67	
序号	代号	名称	数量	材料	单件重量	总计重量	备注

借通用件登记	
描 图	
校 描	
旧底图总号	
签 字	
日 期	